

HSF



RoHS

SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 1000MΩ min
Contact Resistance: 20MΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

BHAR02 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

- ① Series No:
② No. of Contacts
06 08 10 14 16
20 24 26 30 32
34 40 44 50 60
64 80 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
A:PA6T
B:LCP
E:PA9T
⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Recommended P. C. B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SECTION A-A

Unless Otherwise specified tolerance
X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW YG ZHONG DATE 01/05/2016
CHECK BobYang DATE 01/05/2016




Antenk® ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Box Header 90° H=4.90

DRAWING NO: BHAR02-XXXX

PRODUCT NO: BHAR02-XXXX

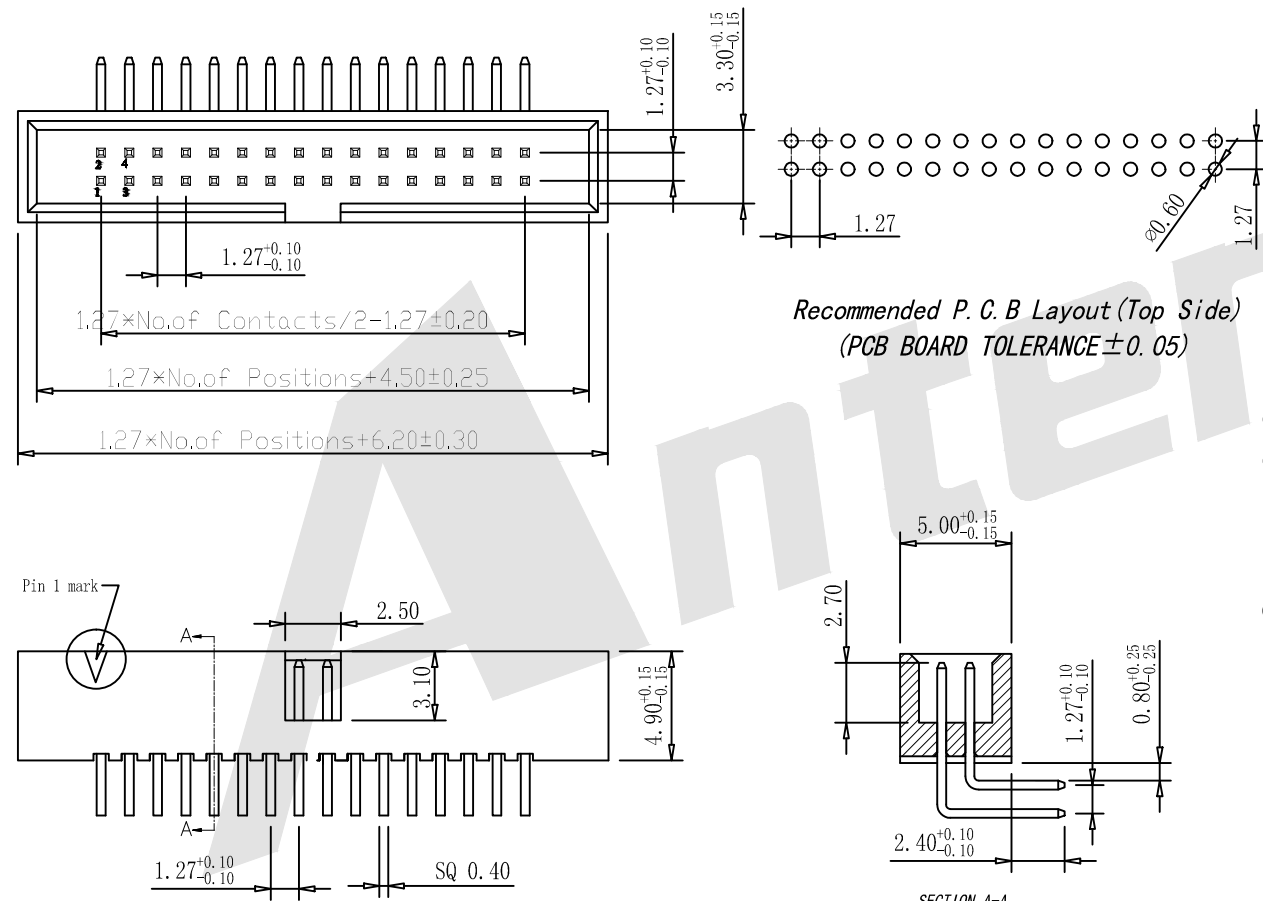

REV DESCRIPTION

DATE