HSF Pb RoHS

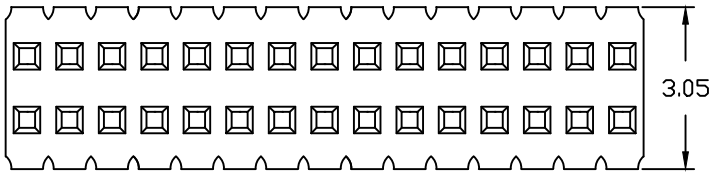

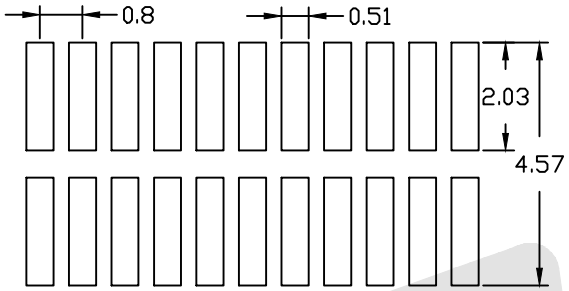

P.C.B LAYOUT

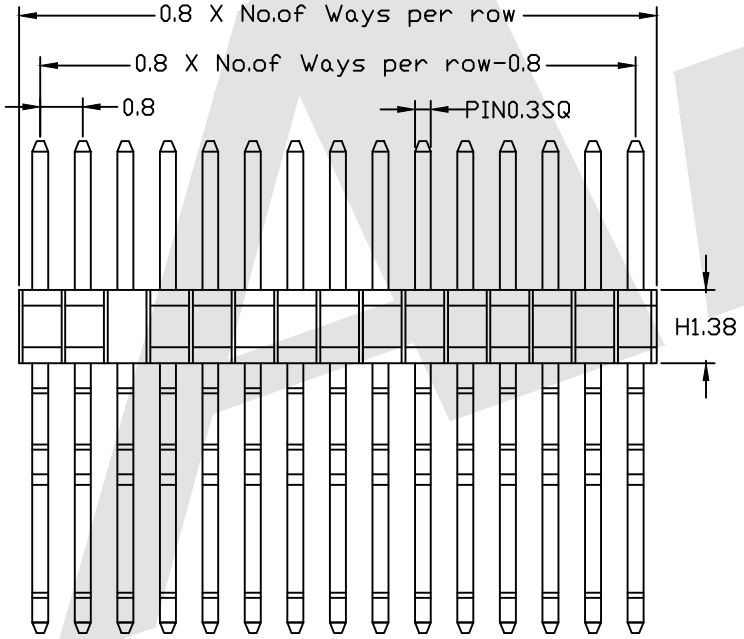

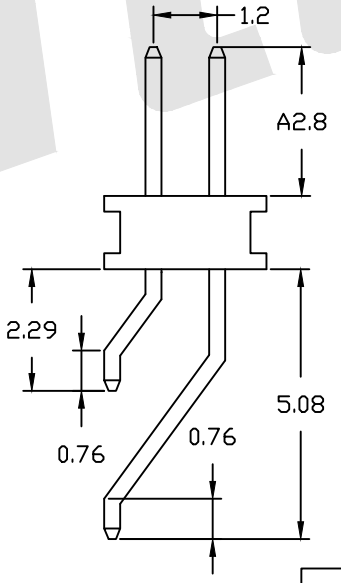

SPECIFICATIONS:

Current Rating: 0.75Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature:-65° C to +125° C
Contact Material: Brass
Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHAR02 - X - X - X - A - B - X - X
① ② ③ ④ ⑤ ⑥ ⑦

①Series No:

②No. of Contacts:
02 To 100

③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U″ Gold S1:Selective 3u″
G2:5u″ Gold S2:Selective 5u″
G3:10u ″Gold S3:Selective 10u″
G4:15u″ Gold S4:Selective 15u″
G5:30u″ Gold S5:Selective 30u″
SN:Tin

④Connector Type:
D:Dual

⑤Pin Length:
A:0280=2.80mm
B:0229=2.29mm
Please mark the desired length in the A/B

⑥Insulator Material:
B:PA6T E:PA9T
C:LCP

⑦Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Standard IE P/N : PHAR02-10-G0-D-0280-0229-B-B

A	B
2.8	2.29
Optional	

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown
UNIT: mm
DRAW Mo Guo Xuan DATE 29/11/2018
CHECK BobYang DATE 29/11/2018

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 0.8mm Pin Header Dual Row Angle SMT Type

DRAWING NO: PHAR02-XXD-0280-0229-XX
PRODUCT NO: PHAR02-XXD-0280-0229-XX

REV	DESCRIPTION	DATE